

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> :

A61H 7/00, A61N 2/08

A1

(11) International Publication Number:

WO 92/14435

(43) International Publication Date:

3 September 1992 (03.09.92)

(21) International Application Number: PCT/NL92/00032

(22) International Filing Date: 13 February 1992 (13.02.92)

(30) Priority data:

9100277

18 February 1991 (18.02.91) NL

(71)(72) Applicant and Inventor: JACOBI, Jacob [NL/NL];  
Speenkruid 28, NL-4251 KB Werkendam (NL).(74) Agent: LIPS, H., J., G.; Breitnerlaan 146, NL-2596 HG  
Den Haag (NL).(81) Designated States: AT, AT (European patent), AU, BB, BE  
(European patent), BF (OAPI patent), BG, BJ (OAPI pa-  
tent), BR, CA, CF (OAPI patent), CG (OAPI patent),  
CH, CH (European patent), CI (OAPI patent), CM (OA-  
PI patent), CS, DE, DE (European patent), DK, DK (Eu-  
ropean patent), ES, ES (European patent), FI, FR (Euro-  
pean patent), GA (OAPI patent), GB, GB (European pa-  
tent), GN (OAPI patent), GR (European patent), HU, IT  
(European patent), JP, KP, KR, LK, LU, LU (European  
patent), MC (European patent), MG, ML (OAPI patent),  
MN, MR (OAPI patent), MW, NL, NL (European pa-  
tent), NO, PL, RO, RU, SD, SE, SE (European patent),  
SN (OAPI patent), TD (OAPI patent), TG (OAPI pa-  
tent), US.


Published

With international search report.

(54) Title: MASSAGING DEVICE

## (57) Abstract

A massaging device comprising a handle (1) with an elongated shape and with a massaging section (8, 17) being releasably connected to said handle. Said massaging section (8, 17) can be directly heated by a heating element (4, 11) provided in the handle or by means of air flowing through a channel (12) provided in the handle (1) through which channel air is passed by means of a fan (13) and along the heating device (11) present in the handle, said air being supplied to the massaging section (8, 17) to heat this portion. Further magnetic means (22) are present in the massaging section (8, 17) for generating a magnetic field around it. Further a metering device can be present for a dosed supply of salve, cream or such like to the massaging section.

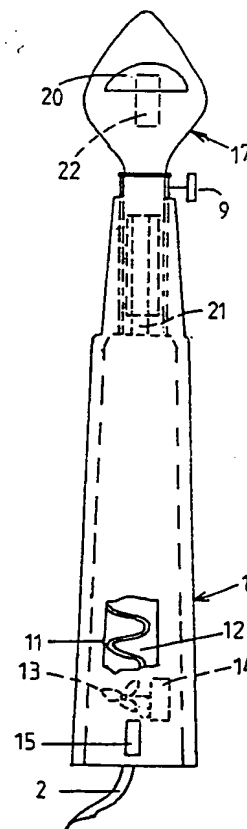

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NI	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

Massaging device.

The invention relates to a massaging device comprising a handle and a massaging section.

In case of known massaging techniques, pain relieving  
5 salve, moist instilling creams, anti-wrinkle creams or such  
like products are rubbed into the skin. It has appeared,  
however, that in this way the salve or cream does not pene-  
trate beyond the upper layer of the skin and the moisture  
that was introduced into the skin will soon disappear again.

10 So the effect of the known massaging devices is rather  
superficial and they are only suitable for very defined  
purposes.

Now it was found that this is substantially caused by  
an insufficient blood circulation in the body tissues as a  
15 result of which nutrients are supplied in insufficient  
quantity and muscles, glands etc. do not function properly.

Now the object of the invention is to provide a massa-  
ging device having a more profound effect and also being  
suitable for treating infections, pains and open wounds.

20 According to the invention this is obtained by the fact  
that either near or in the massaging section means are  
provided for heating said massaging section and for genera-  
ting a magnetic field around it.

By means of heating the muscles and the skin can be  
25 rendered flexible, leading to the opening of the pores to  
the greatest possible extent, enabling the applied cream and  
salve to penetrate both more rapidly and more profoundly  
into the body.

By generating a magnetic field around the massaging  
30 section the effect of the heating and the profound working  
of the massaging device is enhanced.

It has appeared that by this the blood circulation in  
the tissues and thereby supply of nutrients to the tissues  
is improved. Further the removal of waste products is faci-  
35 litated and infections, viruses and such like can be better  
fought.

Open wounds can also be treated with the device accor-  
ding to the invention because no direct contact is necessary  
between the device and the skin. By heating the skin, blood

coming out of the wound will solidify and the wound will be covered by a scab, so that the wound will heal faster and the possibility of infections will be reduced.

It has appeared that the effect of the north pole of  
5 the magnetic field differs from that of the south pole. The north pole can be effectively used for fighting inflammations, infections, viruses and such like and the south pole can be effectively used for fighting chronic pains and such like.

10 The treatment with the magnetic field may well be used in conjunction with treatment by heating, infra-red rays, sound waves, vibrations, laser beams and other techniques used for these purposes.

According to the invention, the massaging device is in  
15 particular characterized by the fact that the handle has an elongated shape, a heating element being positioned in this for heating the massaging section.

By this the massaging section can be small if this is desirable for the treatment of certain places of the body  
20 such as wrinkles in the face, crow's feet etc.

The massaging section can be directly heated by the heating element, but it is also possible that at least one channel is provided in the handle, through which channel air is passed by means of a fan and along the heating element  
25 present in the handle, said air being supplied to the massaging section to heat this portion by means of said air.

With this the massaging section can be executed with a hollow section and can be provided with an air inlet opening connected to the channel in the handle and with an air  
30 outlet opening positioned at distance from the handle so that a flow of heated air can pass through the massaging section at least partially.

In particular there will also be means for controlling the temperature of the heating element and/or for controlling the amount of air flowing along the heating element.  
35

The magnetic field can be generated both by a permanent magnet and an electromagnet. In the latter case the field can be interrupted by means of a switch provided in the handle.

According to an embodiment of the invention the handle can be provided with means for connecting a container for salve, cream or such like products thereto and with a channel for supplying said product to the massaging section.

5 In that case it is not necessary to supply the salve, cream or such like to the skin by hand.

Further, a metering device can be present for a dosed supply of the salve, cream or such like to the massaging section.

10 In particular the massaging section could be a blade and have the shape of a spoon. The convex part of this can possibly be partly furnished with a bumpy surface for an even better treatment of the muscles. By this, a uniform distribution of the accumulated tallow fats is promoted as  
15 well.

The massaging section can be executed such that it can be releasably connected to the handle. Then, the massaging section can be adapted to the use as the need occurs.

Now the invention will be described more in detail by  
20 reference to the accompanying drawings, in which:

Fig. 1 schematically shows a first embodiment, partly in plan view and partly in sectional view, of a massaging device according to the invention in which the massaging section is heated electrically;

25 Fig. 2 schematically shows a second embodiment, partly in plan view and partly in sectional view, of a massaging device according to the invention in which the massaging section is heated by means of air;

Fig. 3 and 4 show a plan view and a side view resp. of  
30 the massaging section of the device shown in fig. 2;

Fig. 5 shows a side view of a massaging section with a partially rough surface and provided with a permanent magnet; and

4 Fig. 6 shows a plan view of a massaging section in  
35 which there is space for inserting an infra-red radiator, vibrating device or the like, possibly in combination with a permanent magnet or electromagnet.

Fig. 1 shows a massaging device comprising a handle 1 with a current supply wire 2 for supplying current to an

adjustable current regulator 3 and from there to a heating element 4, e.g. in the shape of a spiral, and with a fine-tuning button 5 for the current regulator 3. In the heating element 4 an opening 6 is provided in which the shaft 7 of a massaging section 8 can be inserted. The shaft 7 can be fixed by means of a set screw 9. Thus the massaging section 8 can be replaced by another one as the need occurs. Around the heating cell 4 an isolating covering 10 is provided.

In case of the embodiment shown in fig. 2 in the handle 10 1, a heating element 11 is provided within a channel 12 through which air can be passed by means of a fan 13 driven by a small motor 14. A switch 15 is present for supplying current from the supply wire 2 to the heating element 11 and to the motor 14 of the fan 13.

15 At the other end the channel 12 is shaped such that the shaft 16 of a massaging section 17 can be inserted therein. In the shaft 16, an opening 18 is present as appears in particular from the figures 3 and 4. The opening 18 is connected to an air passage 19 in the massaging section 17, 20 said passage debouching into an opening 20 in the back side of said section. In this way, the massaging section 17 can be heated by means of the air flowing through the channels 12 and 19 towards the opening 20.

In the wall of the channel 12 opposite the shaft 16, a 25 groove 21 is provided for passing the air from the channel 12 into the opening 18. By rotating the massaging section 17 in respect of the handle 1 the opening 18 can be brought more or less in overlapping relation with the groove 21 and by this, the amount of air flowing towards the massaging 30 section 17 and out of the opening 20 can be regulated. After adjusting the massaging section 17 it can be fixed by means of the set screw 9.

As appears in particular from fig. 4, in the massaging section 17 a permanent magnet 22 is positioned. Instead of a 35 permanent magnet, an electromagnet can also be used which can be energized by a current supply and a switch provided in the handle 1 in a way not further indicated.

It is also possible to use a metal massaging section which is previously magnetized. A disadvantage of doing so



is the fact that it will be demagnetized in the long run, in particular because the section is heated.

The massaging sections shown in the figures 5 and 6 each have a special shape for the purposes already mentioned 5 above. By an corresponding execution of the shaft of said sections they can be made suitable to be received in the handle 1 of the embodiments shown in the figures 1 and 2.

-----

C L A I M S

1. A massaging device comprising a handle (1) and a massaging section (8,17), characterized in that either near or in the massaging section (8,17) means (4,11,22) are provided for heating said massaging section and for generating a magnetic field around it.
2. A massaging device according to claim 1, characterized in that the handle (1) has an elongated shape, a heating element (4,11) being positioned in this for heating the massaging section (8,17).
3. A massaging device according to claim 2, characterized in that at least one channel (12) is provided in the handle (1), through which channel air is passed by means of a fan (13) and along the heating element (11) present in said handle (1), said air being supplied to the massaging section (17) to heat this.
4. A massaging device according to claim 3, characterized in that the massaging section (17) is executed with a hollow section and is provided with an air inlet opening (19) connected to the channel (12) in the handle (1) and with an air outlet opening (20) positioned at distance from the handle (1) so that a flow of heated air can pass through the massaging section (17) at least partially.
5. A massaging device according to one of the claims 2-4, characterized in that means (3,5;18,21) are present for controlling the temperature of the heating element (4,11) and/or for controlling the amount of air flowing along the heating element (11).
6. A massaging device according to one of the preceding claims, characterized in that the handle (1) is provided with means for connecting a container for salve, cream or such like products to it and with a channel for supplying said product to the massaging section (8,17).


7. Massaging device according to claim 6, characterized in that a metering device is present for a dosed supply of the salve, cream or such like to the massaging section (8,17).

8. Massaging device according to one of the preceding 5 claims, characterized in that the massaging section is a blade and has the shape of a spoon.

9. Massaging device according to claim 8, characterized in that the convex part of the blade (8,17) is at least partly furnished with a bumpy surface.

10 10. Massaging device according to one of the preceding claims, characterized in that the massaging section (8,17) is releasably connected to the handle (1).

-----

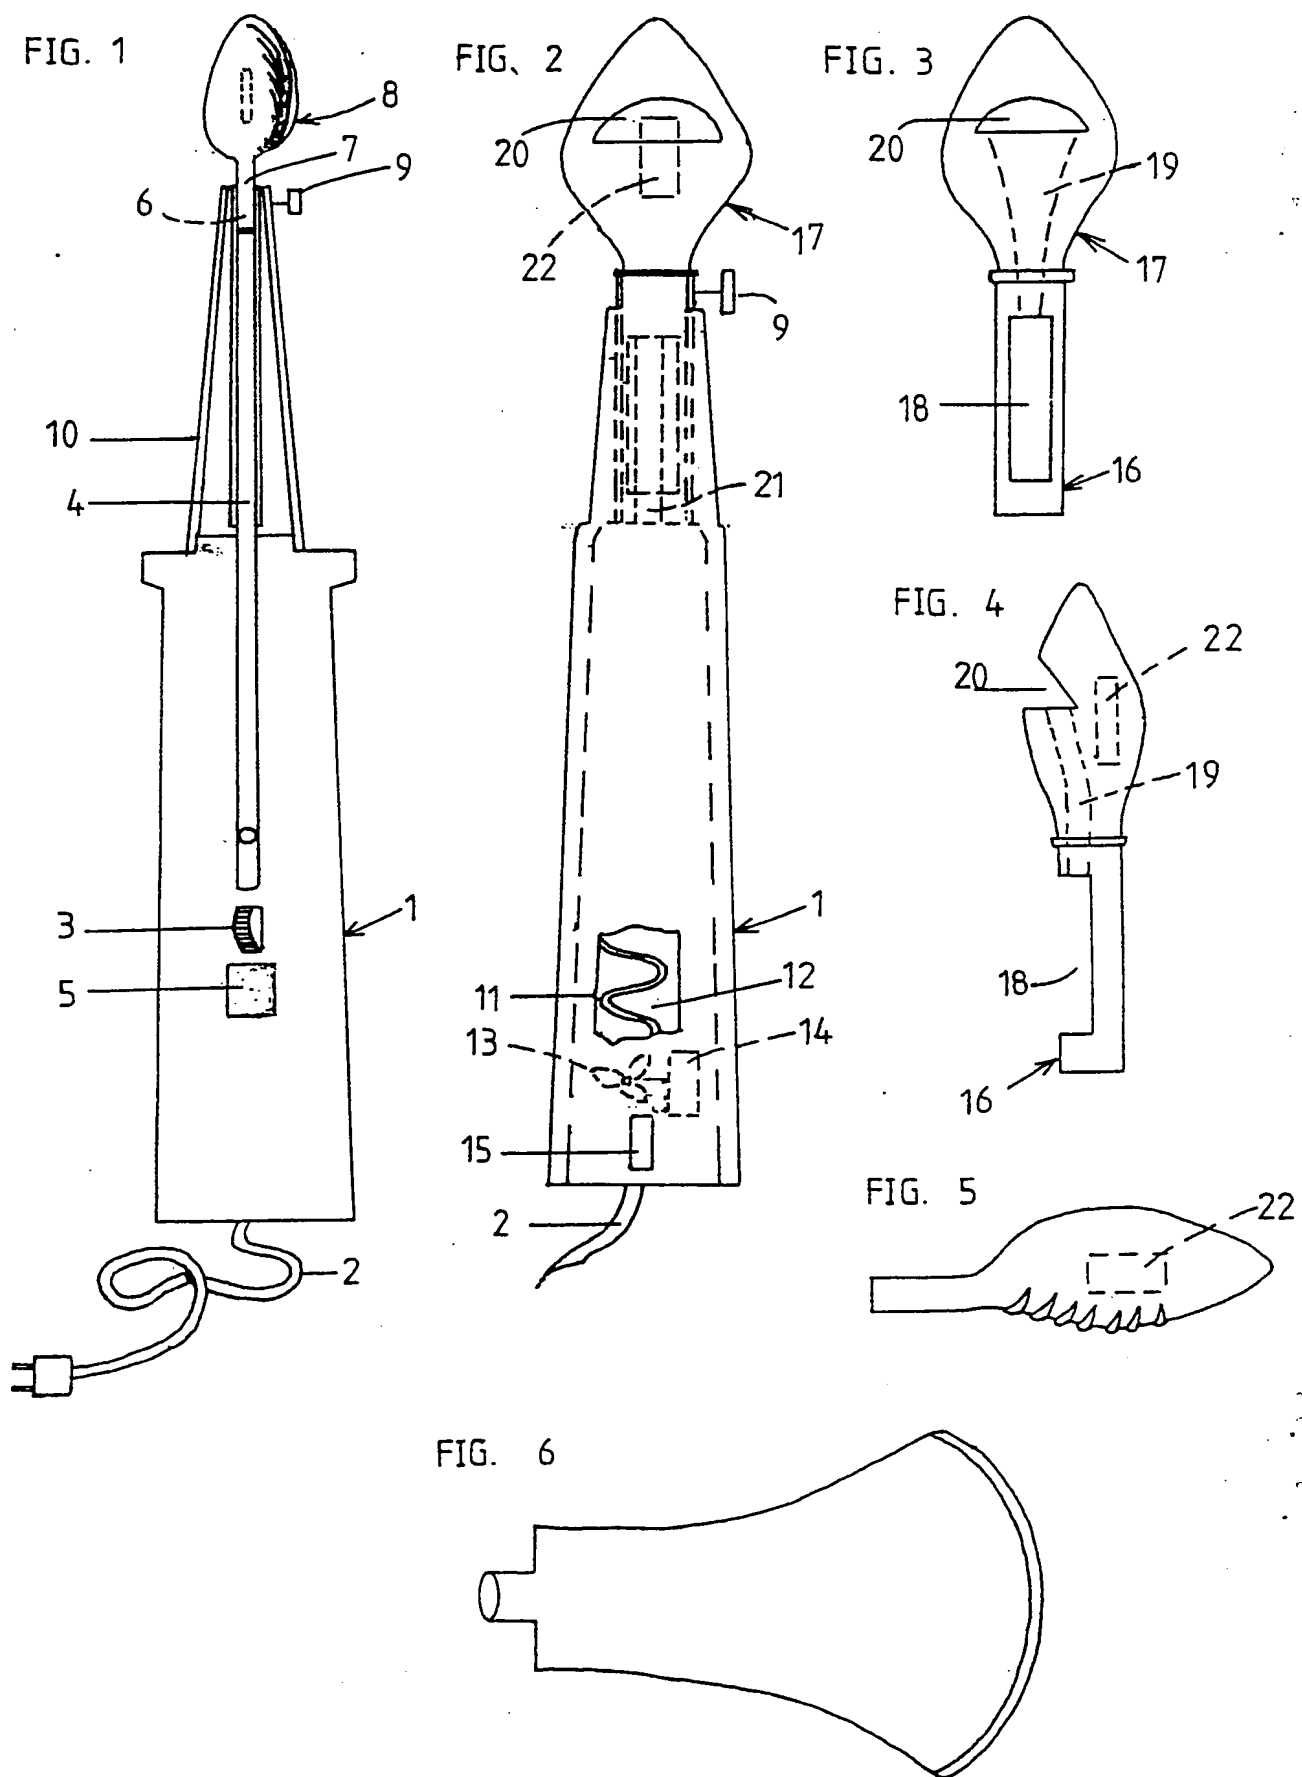

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 92/00032

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)<sup>6</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 A61H7/00; A61N2/08

## II. FIELDS SEARCHED

Minimum Documentation Searched<sup>7</sup>

Classification System

Classification Symbols

Int.Cl. 5

A61H

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched<sup>8</sup>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup>

Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
X Y	US,A,4 691 693 (SATO) 8 September 1987 see column 1, line 48 - line 53; figures see column 2, line 23 - line 57 ---	1,2,5,10 3,4,6-9
Y	WO,A,8 604 809 (RUDERIAN) 28 August 1986 see page 9, last paragraph - page 10, paragraph 1; figures 4,23-25 see page 14, line 2 - line 5 see page 19, paragraph 2 see page 20, paragraph 3 ---	3,4,6,7
Y	WO,A,8 603 664 (ROTH) 3 July 1986 see page 12, last paragraph - page 13, paragraph 1; figures 1,2 ---	7
Y	FR,A,2 341 285 (SCRATCHER S.A.) 16 September 1977 see claim 1; figures 1,2 ---	8,9
	--- -/--	

<sup>10</sup> Special categories of cited documents:<sup>"A"</sup> document defining the general state of the art which is not  
considered to be of particular relevance<sup>"E"</sup> earlier document but published on or after the international  
filing date<sup>"L"</sup> document which may throw doubts on priority claim(s) or  
which is cited to establish the publication date of another  
citation or other special reason (as specified)<sup>"O"</sup> document referring to an oral disclosure, use, exhibition or  
other means<sup>"P"</sup> document published prior to the international filing date but  
later than the priority date claimed<sup>"T"</sup> later document published after the international filing date  
or priority date and not in conflict with the application but  
cited to understand the principle or theory underlying the  
invention<sup>"X"</sup> document of particular relevance; the claimed invention  
cannot be considered novel or cannot be considered to  
involve an inventive step<sup>"Y"</sup> document of particular relevance; the claimed invention  
cannot be considered to involve an inventive step when the  
document is combined with one or more other such docu-  
ments, such combination being obvious to a person skilled  
in the art.<sup>"&"</sup> document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search

19 MAY 1992

Date of Mailing of this International Search Report

16. 06. 92

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

JONES M.

## III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
X	US,A,4 082 089 (MORIYAMA ET AL.) 4 April 1978 see column 2, line 32 - line 49; figure 4 ---	1,2,5
X	FR,A,2 592 579 (GROSS) 10 July 1987 see claims; figures ---	1,2,5
X	US,A,2 795 224 (BRANDENBURG) 11 June 1957 see column 1, line 32 - line 35; claim; figures ---	1
X	SOVIET PATENTS ABSTRACTS Section PQ, Week 8818, 5 May 1988 Derwent Publications Ltd., London, GB; Class P33, AN 88-125035/18 & SU,A,1 342 501 (GLAVMOSPROMSTROIMAT) 7 October 1987 see abstract ---	1

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO. NL 9200032  
SA 57235**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 19/05/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4691693	08-09-87	None	
WO-A-8604809	28-08-86	US-A- 4596565	24-06-86
		US-A- 4640284	03-02-87
		US-A- 4597757	01-07-86
		US-A- 4722326	02-02-88
		AU-A- 5357386	10-09-86
		EP-A- 0211867	04-03-87
		JP-T- 62500987	23-04-87
WO-A-8603664	03-07-86	DE-A- 3446136	26-06-86
		EP-A- 0205500	30-12-86
		US-A- 4775256	04-10-88
FR-A-2341285	16-09-77	CH-A- 595073	31-01-78
		BE-A- 851468	16-06-77
		NL-A- 7701547	19-08-77
US-A-4082089	04-04-78	None	
FR-A-2592579	10-07-87	None	
US-A-2795224		None	

**This Page Blank (uspto)**